



FREE FOLD-S

FOR 2 PIECE BI-FOLDING FLAP DOORS
CONNECTING HINGE



Drilling pattern

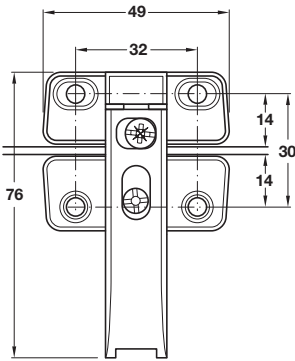

To avoid injuries the hinge comes apart when fingers get trapped unintentionally in the gap of the flap

- > Area of application: For use with Free Fold-S fitting
For wooden flaps
- > Features: With finger protection function
- > Material: Zinc-alloy
- > Adjustment facility: 3-way adjustment: ±2 mm side adjustment, -1 to +2 mm gap adjustment, ±1.5 mm depth adjustment

Quantity of hinges required	
For door width (mm)	No. of hinges
Up to 600	2
Between 600-800	2-3
Over 800	3


Finish	Cat. No.
Nickel-plated	372.64.796

Packing: 1 piece



Note:
Order fixing screws separately.

OPENING ANGLE RESTRAINT

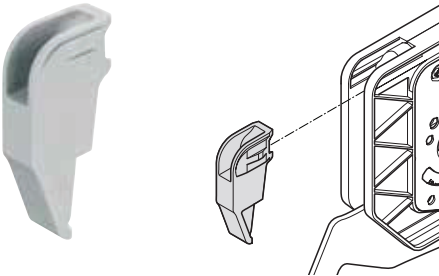

- > Area of application: For use with Free Fold-S fitting
- > Features: Restricts the opening angle to 90° for low level applications
- > Material: Plastic

Finish	Cat. No.
Grey	372.37.060

Packing: 1 set (2 pieces required per flap fitting set)